

PERFORATED TOP PANEL SHOWN FOR REFERENCE


19" 9 RMU

CABLE ACCESS CUT OUT COVERED WITH BRUSH GROMMET

TOP VIEW

PAIR OF SOLID LIFT OFF SIDE PANELS w/LOCK AND FINGER RELEASE LATCHES

MESH FRONT DOOR SHOWN FOR REFERENCE 180° SWING (TYPICAL FRONT AND REAR)

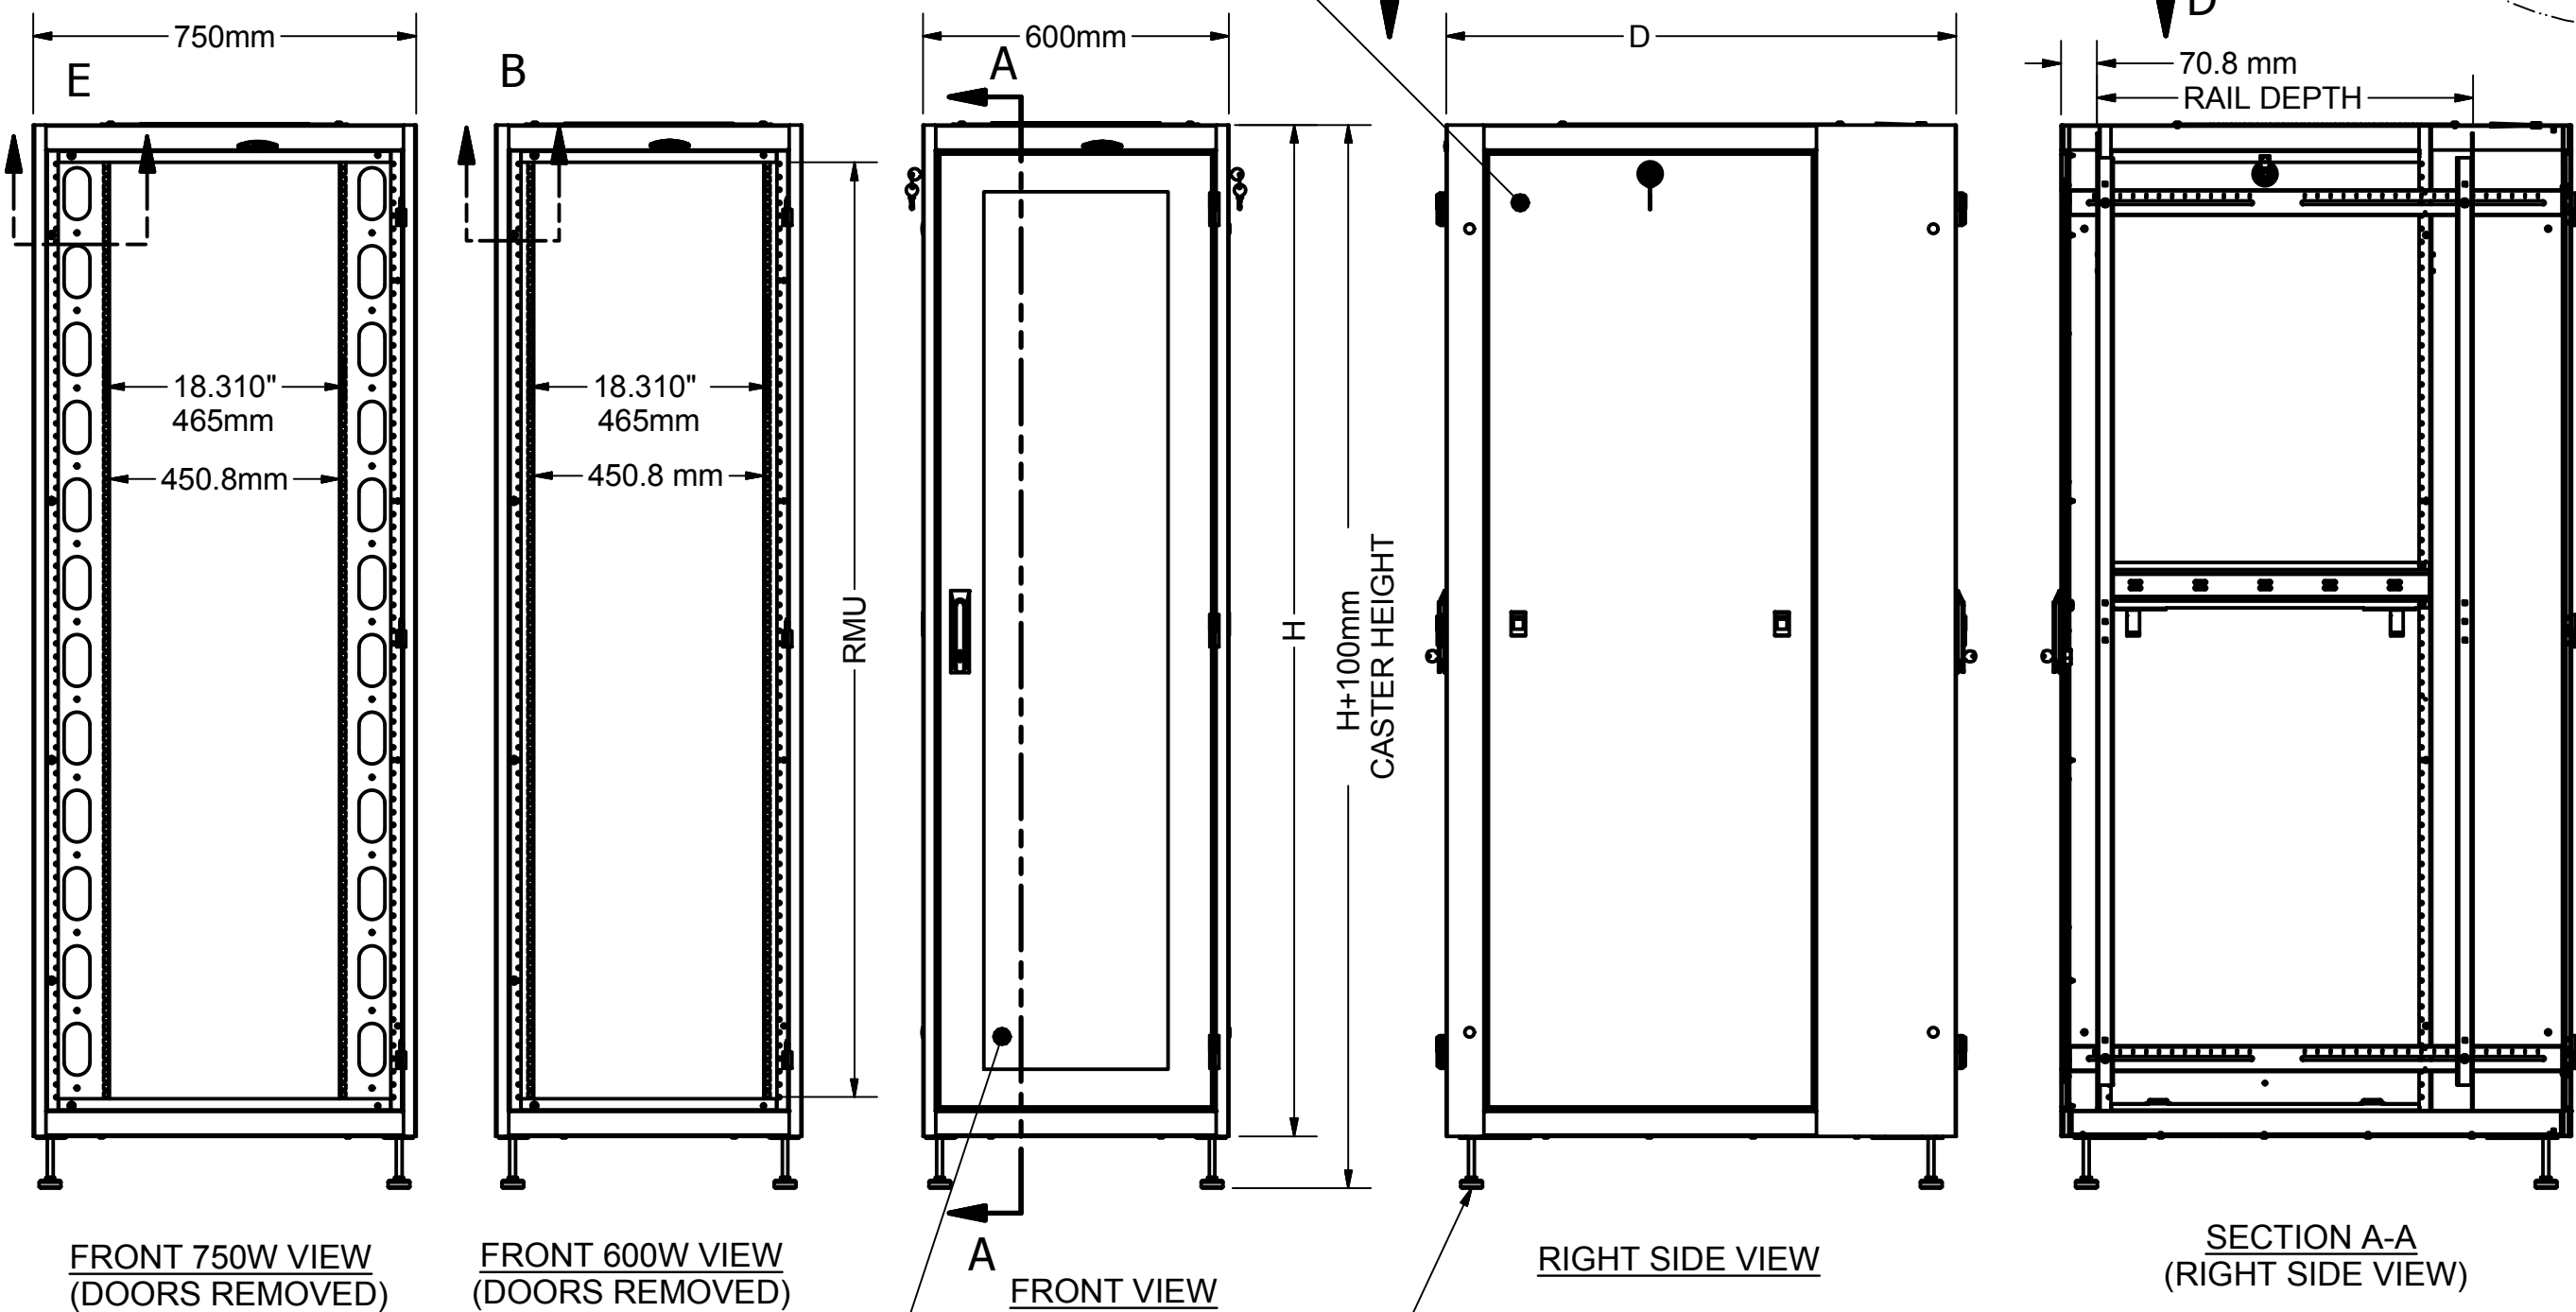

FRONT 750W VIEW (DOORS REMOVED)

FRONT 600W VIEW (DOORS REMOVED)

FRONT VIEW

RIGHT SIDE VIEW

SECTION A-A (RIGHT SIDE VIEW)

•MESH FRONT DOOR, SHOWN FOR REFERENCE  
•LIFT OFF AND FIELD REVERSIBLE (FRONT AND REAR)

LEVELING GLIDES M12 THREADED HOLES

CABLE ACCESS AREA

Ø15mm FLOOR MOUNTING HOLE  
OPTIONAL CASTER MOUNTING LOCATIONS

BOTTOM VIEW

**SPECIFICATIONS:**

- RACK SPACES:** 19" EIA 310-E COMPLIANT - SEE CHART
- WEIGHT CAPACITY:** 500kg (BOLTED TO FLOOR, LEVELERS, OR ON CASTERS.)
- COLOR:** DURABLE TEXTURED BLACK POWDER COATING
- CONSTRUCTION:** 2 PAIR MOUNTING RAILS, 2.5mm C.R.S. FULLY WELDED FRAME, 1.5mm C.R.S. DOORS, SIDE PANELS, TOP PANEL, 1.5mm C.R.S.
- HARDWARE:** PACKAGE OF QTY-20, M6 SCREWS AND CAGE NUTS, INCLUDED.
- ADDITIONAL HEIGHT FOR THE CASTORS IS 100mm.

W- 600mm WIDE ENCLOSURES				
RMU - TOTAL	H - HEIGHT [mm]	D- DEPTH 600mm	D- DEPTH 800mm	D- DEPTH 1000mm
18	908	o	o	o
24	1219	o	o	o
32	1524	o	o	o
37	1829	o	o	o
42	1981	o	o	o
47	2204	o	o	o

W-750mm WIDE ENCLOSURE				
RMU - TOTAL	H - HEIGHT [mm]	D- DEPTH 600mm	D- DEPTH 800mm	D- DEPTH 1000mm
24	1219	o	o	o
42	1981	o	o	o
47	2204	o	o	o

RAIL DEPTH		
DEPTH 600mm	DEPTH 800mm	DEPTH 1000mm
18.25" / 464mm	18.25" / 464mm	29" / 737mm