



BTR2458

2.4 and 5 GHz

Multiposition Antenna

Features

- ◆ Groundplane Independent
- ◆ Covers 2.4 and 5 GHz bands
- ◆ Locks in three positions for flexibility
- ◆ Ideal for fixed and mobile terminals

Specifications

Radiating element	1/2 Wave Element
Frequency range	2400-2500 / 4900-6000 MHz
Gain	2 dBi
Polarisation	Linear
VSWR	< 2.0:1
Power rating	10W
Connector	SMA-Male (multiposition)
Dimensions	99.5 x 11mm (max)

Popular Ordering Options


FBTR35160-SM-KR	BTR2458 antenna with SMA-Male connector
-----------------	---

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK


Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com

EAD 
embedded antenna design ltd
Delivering Antenna Innovation

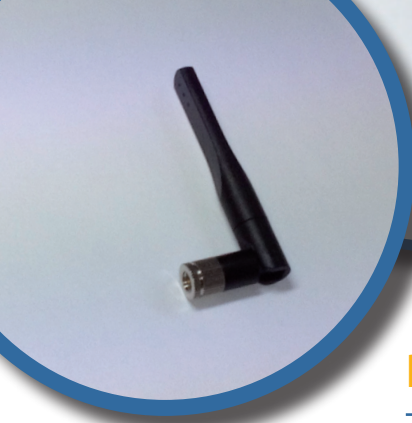


PBTR2458 | 2.4 / 5GHz Multiposition Antenna

VSWR

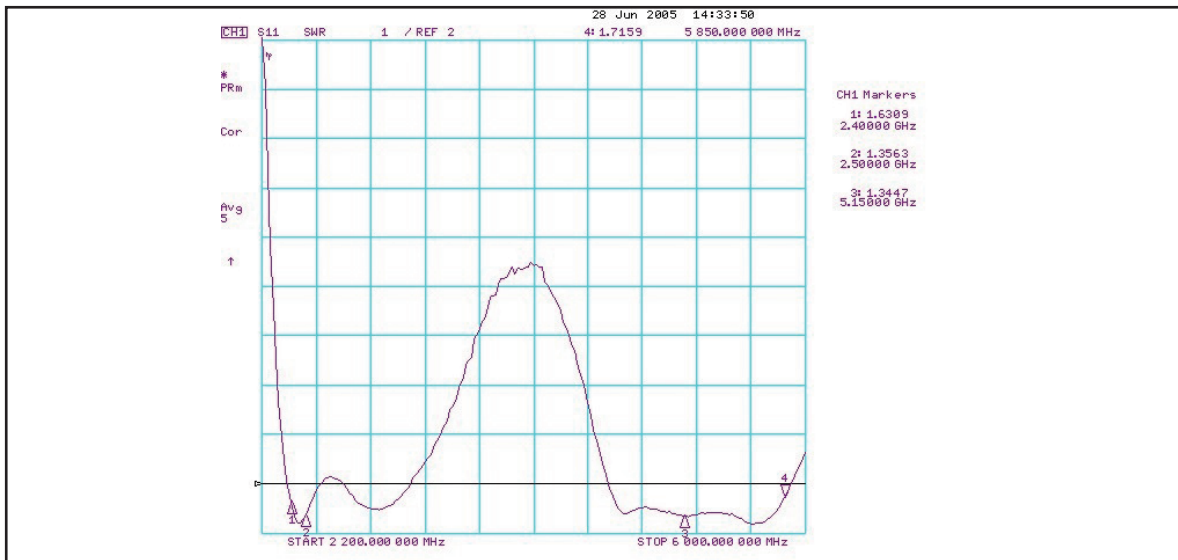

Outline Drawing

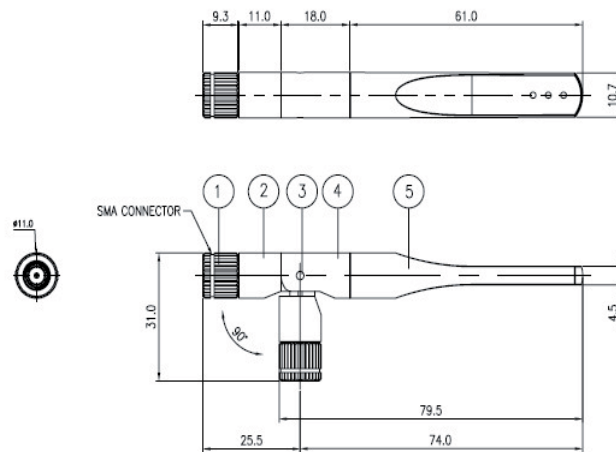

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com