

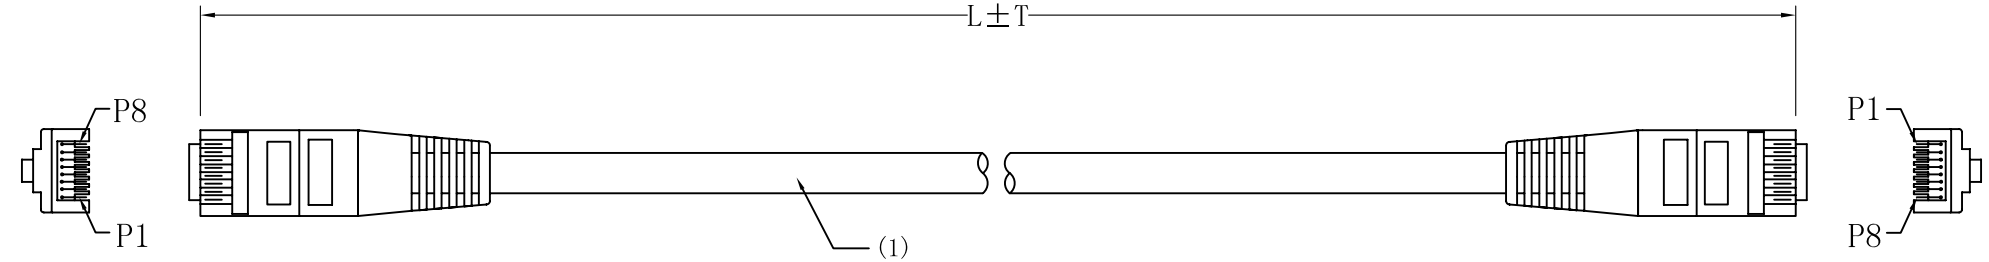


CUSTOMER	E E T
PRODUCT NO.	UTP60**

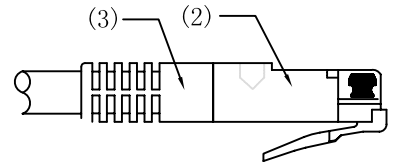


PRODUCT NO	UTP6005	UTP601	UTP6015	UTP602
L ± T (mm)	500 ± 5	1000 ± 10	1500 ± 15	2000 ± 20
PRODUCT NO	UTP607	UTP610	UTP625	UTP650
L ± T (mm)	7000 ± 70	10000 ± 100	25000 ± 250	50000 ± 500


SIDE:A

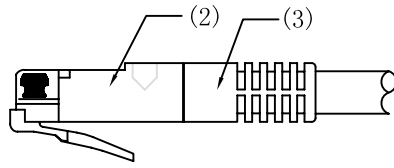

SIDE:B

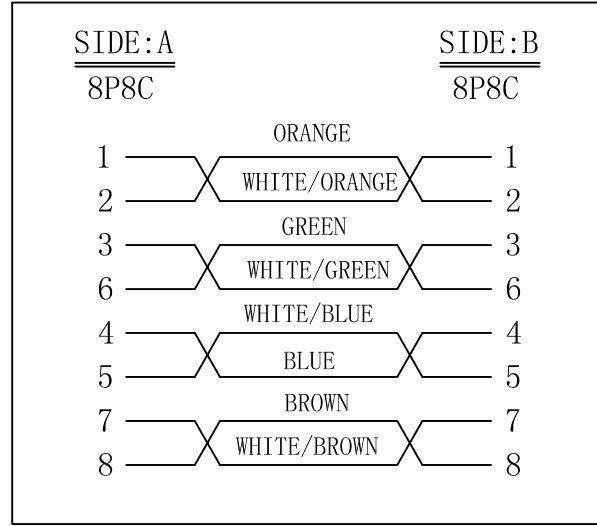

PIN OUT: (4)

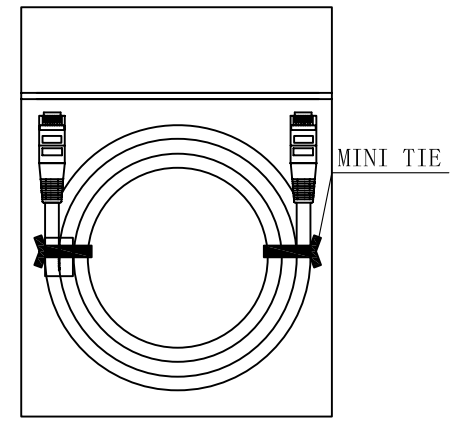

PACKING: (5)

NOTE:

- (1). Cable Spec: CAT.6 UTP Stranded 24AWG(CU)*4P+”+” Support
Jacket Material:LSZH OD:5.8 ± 0.20mm
Cable Colour:Grey
Cable Printing: System Cable UTP CAT6 4 Pairs 24AWG
Stranded ISO 11801 250MHz
- (2). Connector A&B: RJ45(8P8C) Male Type
INSULATION:Clear Polyester
CONTACTS:Brass, Gold Plated 3u’
- (3). Over Mold: LSZH, Grey
- (4). Parameter Settings: UT8080M
 - 1. Conductive Resistance:1k Ω
 - 2. Insulative Resistance:5M Ω (Min.)
- (5). Packing: One Printed Polybag/IPC Packing+label