

WavePOS 88



Ready in Windows System



MSR & Finger Printer



2nd LCD Display



Customer Display
Easy Installation



5th USB

System

CPU Support	Intel® Celeron® Bay Trail J1900 Processor (up to 2.42 GHz)
Memory	Support up to 8GB DDR3L
Core Logic	Intel® Bay Trail
Network	10/100/1000 Base-T Gigabit Ethernet
Audio	1W Speaker
Power Supply	12V Power Adaptor
System Weight	4.8 kgs
Dimension	395 x 310 x 260 mm (WxHxD)
OS	POSReady 7, Windows 7, Windows 8, Windows 10

Display

LCD	15.6" TFT LCD Panel
Max. Resolution	1366 x 768
Brightness	220 nits
Touch Screen	5 Wires Resistive Touch Screen

Storage

HDD	1 x 2.5" SATA HDD
SSD	SSD SATA Interface Max. 1 TB

Environmental


Operating Condition	0°C ~ 40°C, 20% RH ~ 80% RH
Storage Condition	-20°C ~ 60°C, 10% RH ~ 90% RH

Safety

Safety Standards	CCC / CE / FCC
------------------	----------------

I/O Ports

Serial Ports	4 x External COM (RJ Type, w / +5V / 12V Power Selectable)
USB Ports	5 x External USB 2.0 Ports
Ethernet	1 x 10 / 100 / 1000 Mbps (RJ45)
mPCIe	1 x Internal Slot
VGA	1 x DB-15 VGA Interface
Parallel Port	1 x DB-25
Audio	2 x 1W Speaker
Cash Drawer	1 x RJ11 (12V)
DC-IN	12V DC-IN
Power Switch	1 x Power Switch

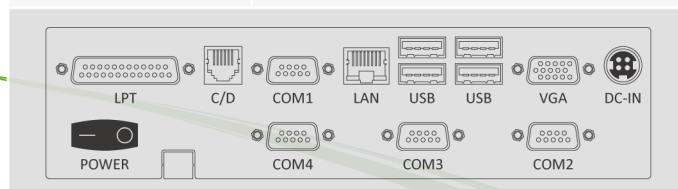

Features



Industrial LCD Panel



Touch Panel



Industrial Circuit & Components



Intel® CPU

Option Peripherals



2nd LCD Monitor



Magnetic Stripe Card Readers



Customer Display



Barcode Scanner



Thermal Printer



QR Code Scanner



Cash Drawer